


Marlow®

DATASHEET

DOUBLEBRAID

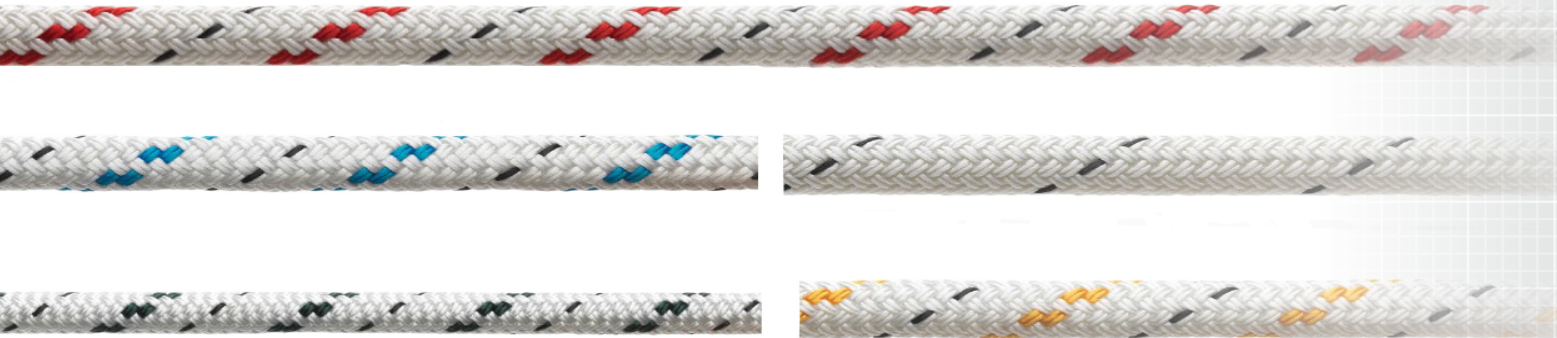

CONSTRUCTION

MATERIAL CORE:	High Tenacity Polyester
MATERIAL COVER:	High Tenacity Polyester
CORE CONSTRUCTION:	12 strand braided
COVER CONSTRUCTION:	24 plait braided

PROPERTIES

DOUBLEBRAID CONSTRUCTION:	Flexible and easily spliced
HEAT SET:	Excellent stability improves 'feel' and spliceability
HIGH STRENGTH:	Good general purpose line
GOOD UV RESISTANCE:	Durable

PERFORMANCE

DIAMETER		CIRCUMFERENCE		MASS		AVERAGE STRENGTH			MIN STRENGTH		
mm	Inch	g/m	lb/100 ft	kg	lb	kN	kg	lb	kN		
6	7/32	28.4	1.90	1390	3058	13.6	1279	2813	12.5		
8	5/16	48	3.22	2560	5632	25.1	2355	5181	23.1		
10	3/8	74.7	5.01	3690	8118	36.2	3395	7469	33.3		
12	1/2	111	7.44	4760	10472	46.7	4379	9634	43.0		
14	9/16	155.5	10.43	6050	13310	59.4	5566	12245	54.6		
16	5/8	193	12.94	7230	15906	70.9	6652	14634	65.3		
18	3/4	231.7	15.54	7910	17402	77.6	7277	16010	71.4		

Marlow Ropes Ltd
Ropemaker Park
Hailsham
East Sussex, BN27 3GU
England

Marlow Ropes, Inc.
Cordage Business Park
Plymouth
MA 02360
USA

www.marlowropes.com
UK: +44 (0) 1323 444 444
sales@marlowropes.com
US: +1 508 830 444
salesusa@marlowropes.com



Disclaimer

Marlow Ropes Ltd endeavours to ensure that all products are manufactured to the highest standard, these guidelines are not intended and do not create any warranties, express or implied. Marlow Ropes Ltd expressly disclaims warranties or representations of any kind, express or implied, including the implied warranties of merchantability and fitness for a particular purpose. Marlow Ropes Ltd shall not be liable for any consequential, incidental or contingent damages whatsoever stemming from the use of these guidelines. Marlow Ropes Ltd has a policy of continual improvement which may result in specification and colour changes without prior notice.